



TTerm Setup for iPad

1. Access AppStore App on your iPad
2. Type in *tterm pro* in the **SEARCH** field

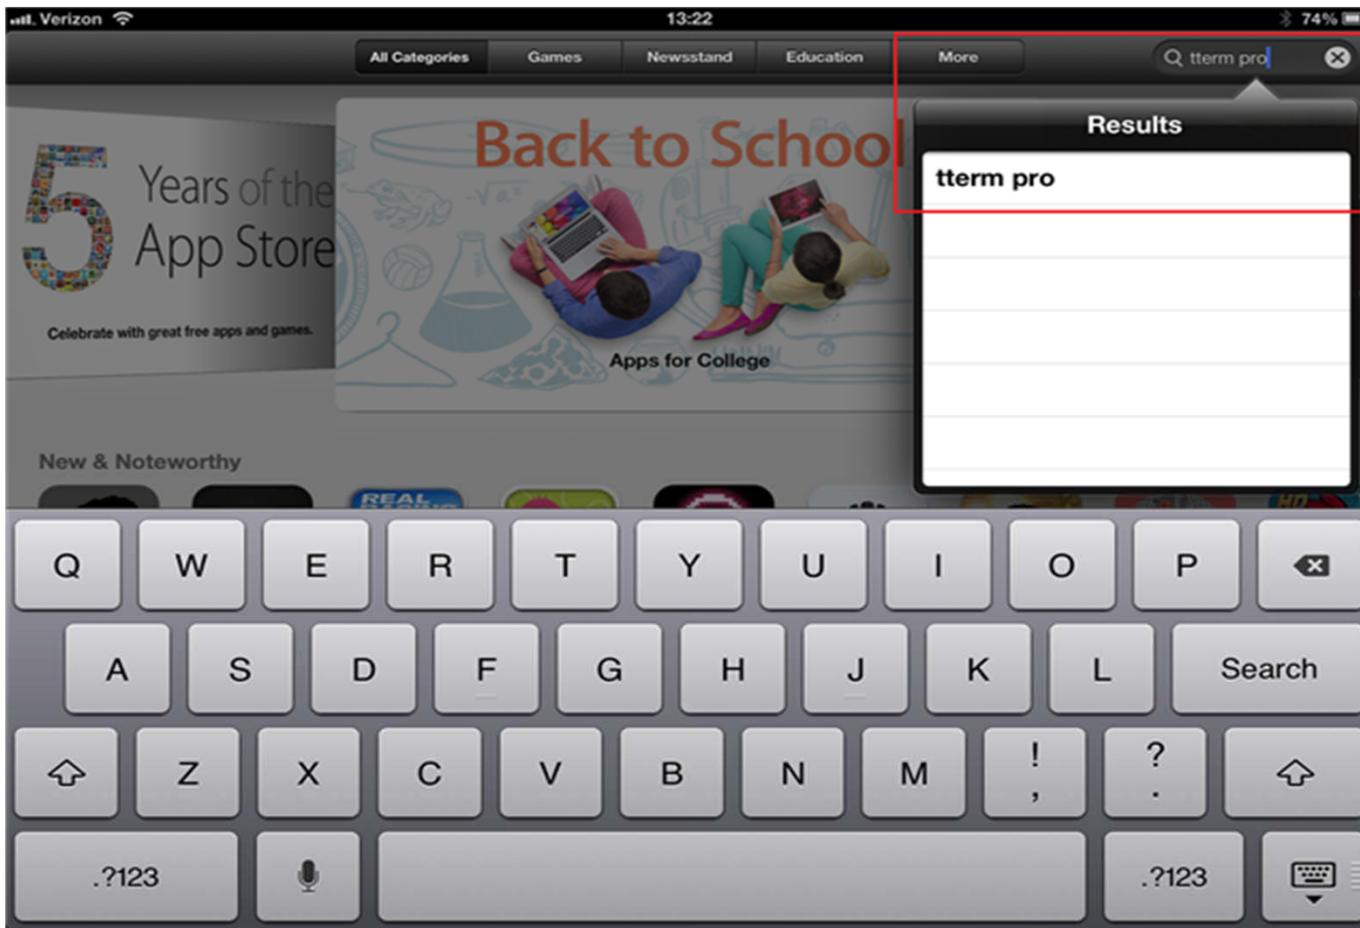


3. Select the one that says **TTERM PRO**
4. It should be \$49.95
5. Enter your iTunes Account Password

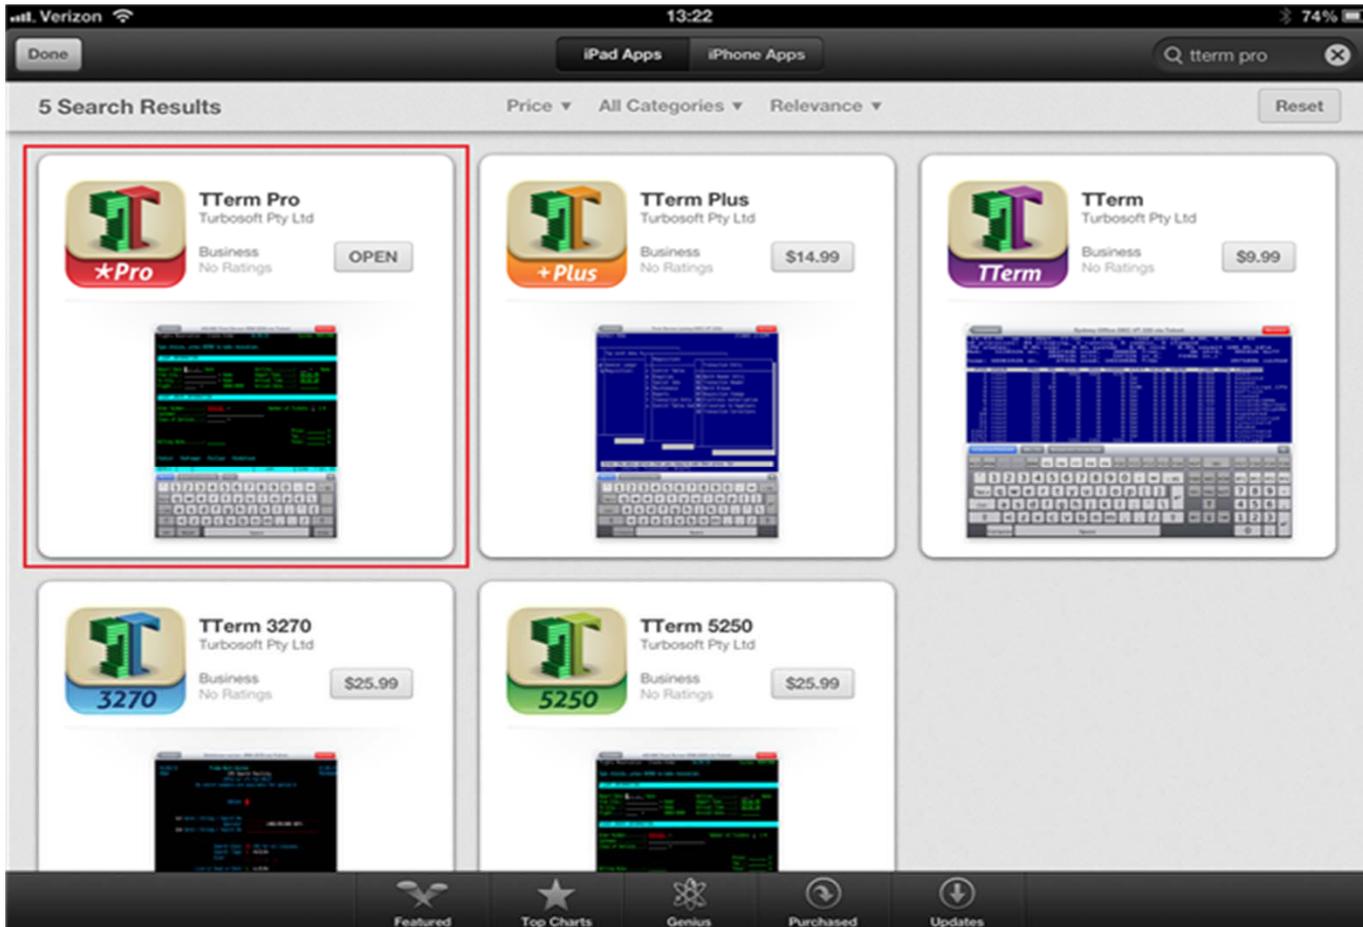


6. Click on the **TTERM PRO** App



7. Once your App is open, you will see *Create a New Connection* . Select it

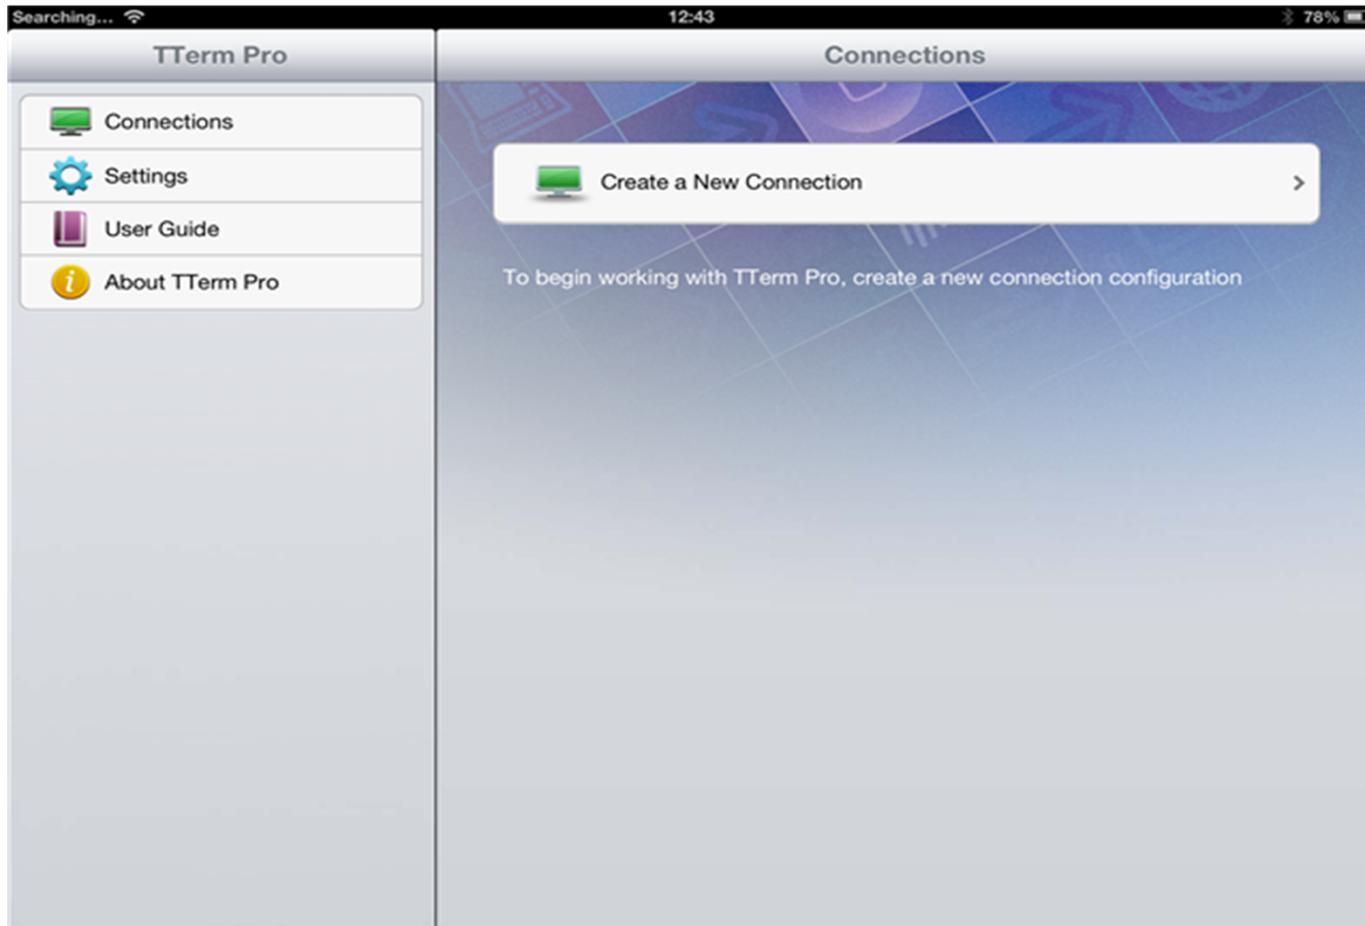

8. You will see the settings for your new connection. It should look like the picture below

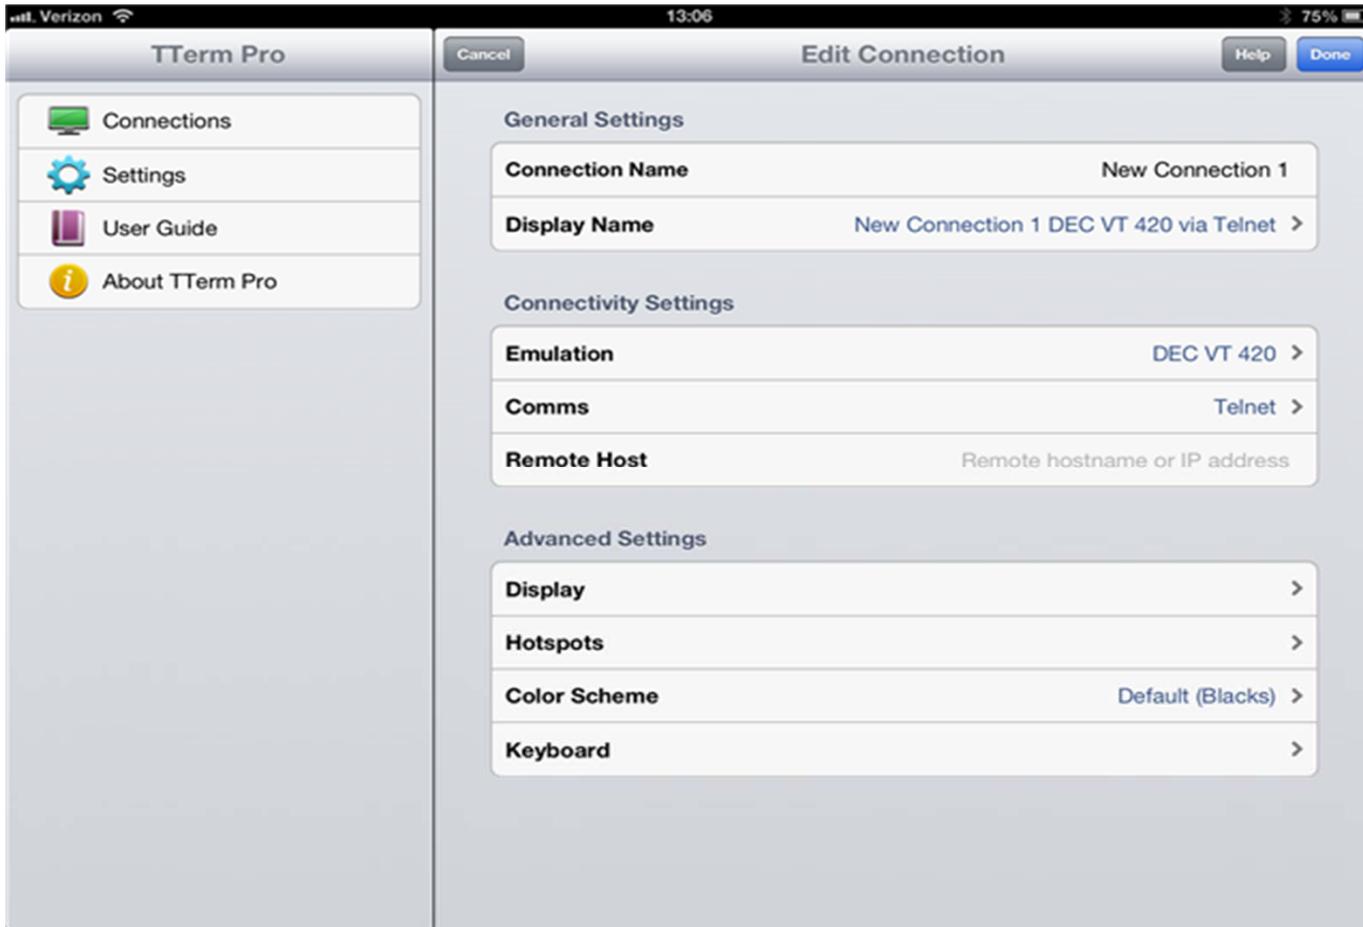


9. Now click where it says *New Connection 1* and change it to what you want to name it

In this example, we called it **CSLINUX**


10. After you're done editing **CONNECTION NAME**, click on **DISPLAY NAME**



11. In the **DISPLAY NAME** windows, make sure it only says *[connection name]*
12. Click on **EDIT CONNECTIONS** to go back

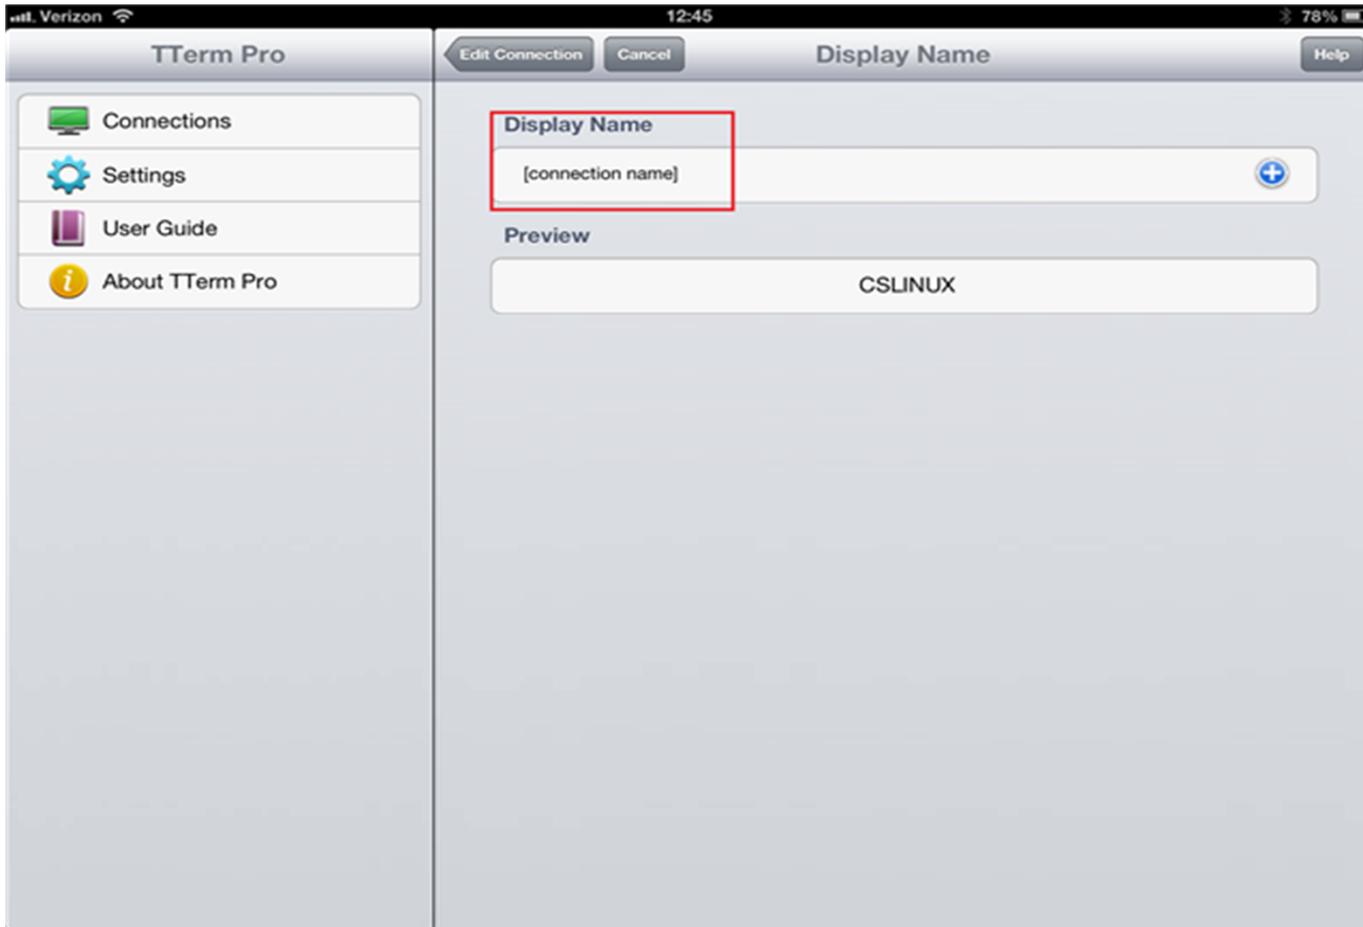

13. Now click on **EMULATION** under **EMULATION TYPE**

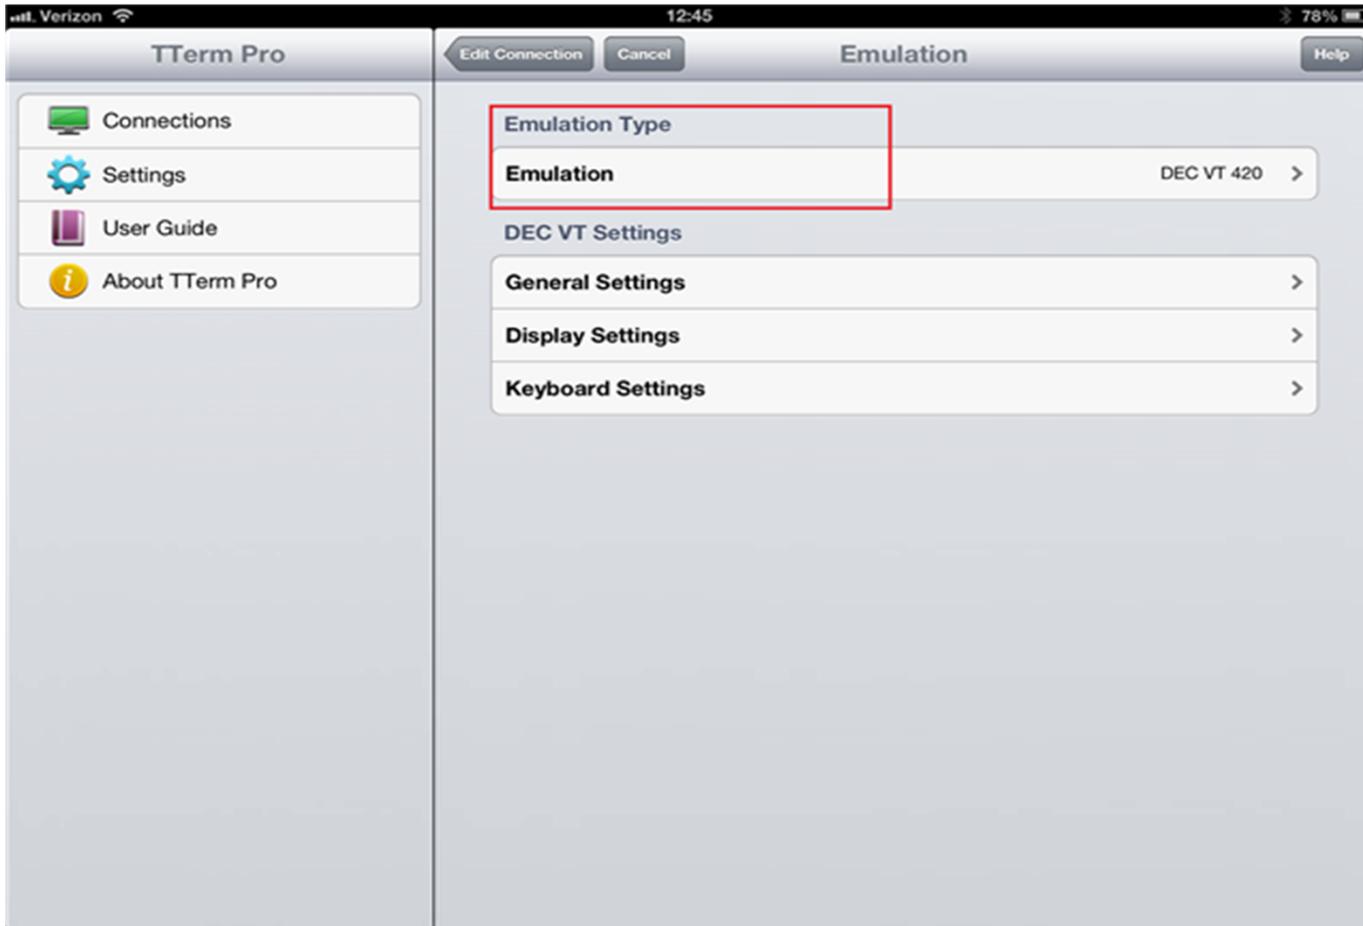


14. Scroll down towards the bottom and select **TELEVIDEO 955**.
15. Click on **EMULATION** to go back and then **EDIT CONNECTION**




16. Now select **COMMS**

17. Under **COMMS TYPE**, select **COMMS** again

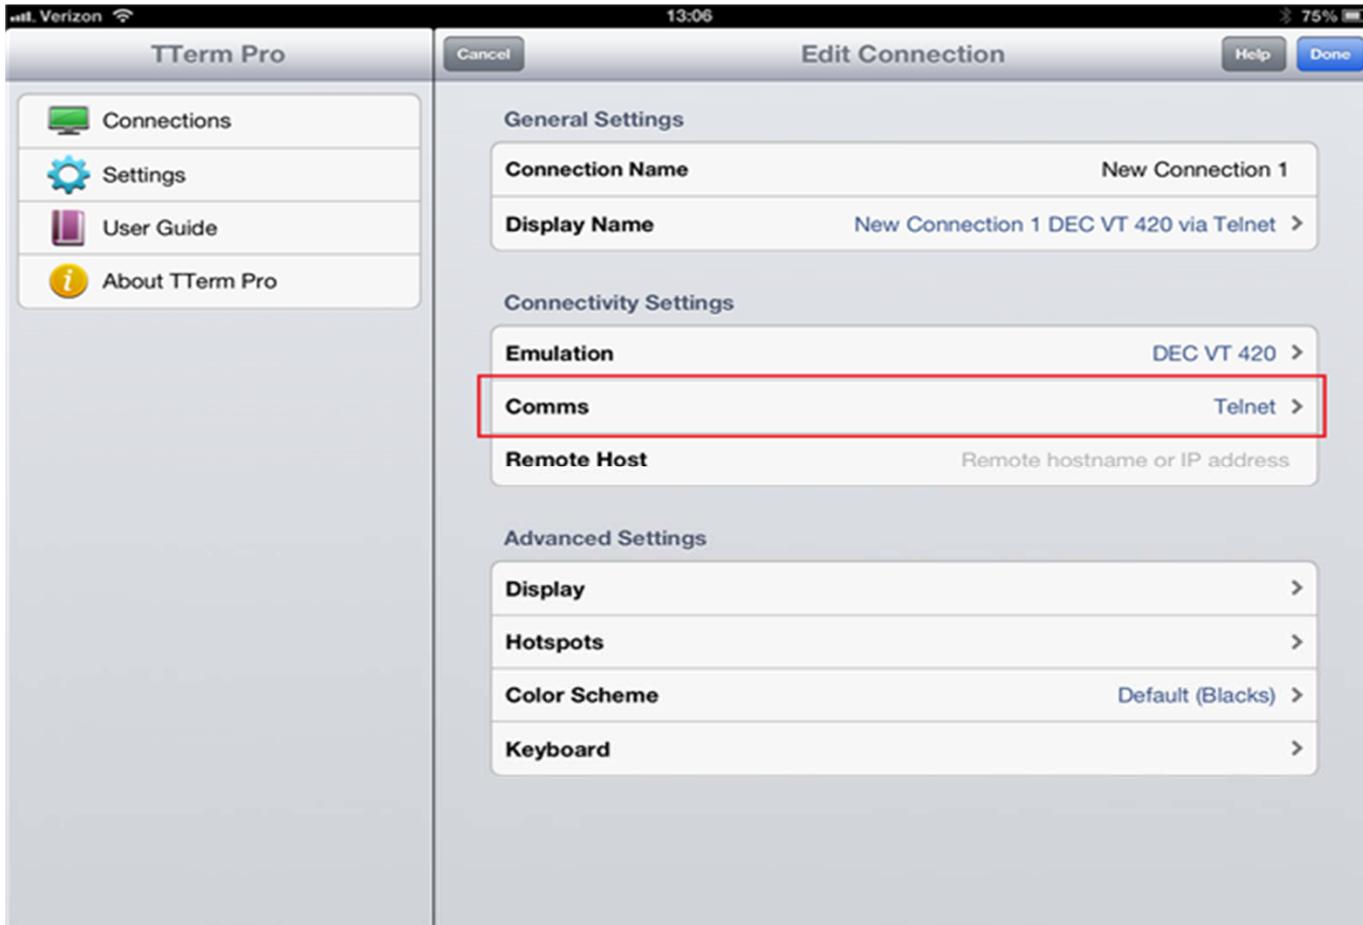


18. Select **SSH-SECURE SHELL**

19. Click on **COMMS** and then **EDIT CONNECTION**

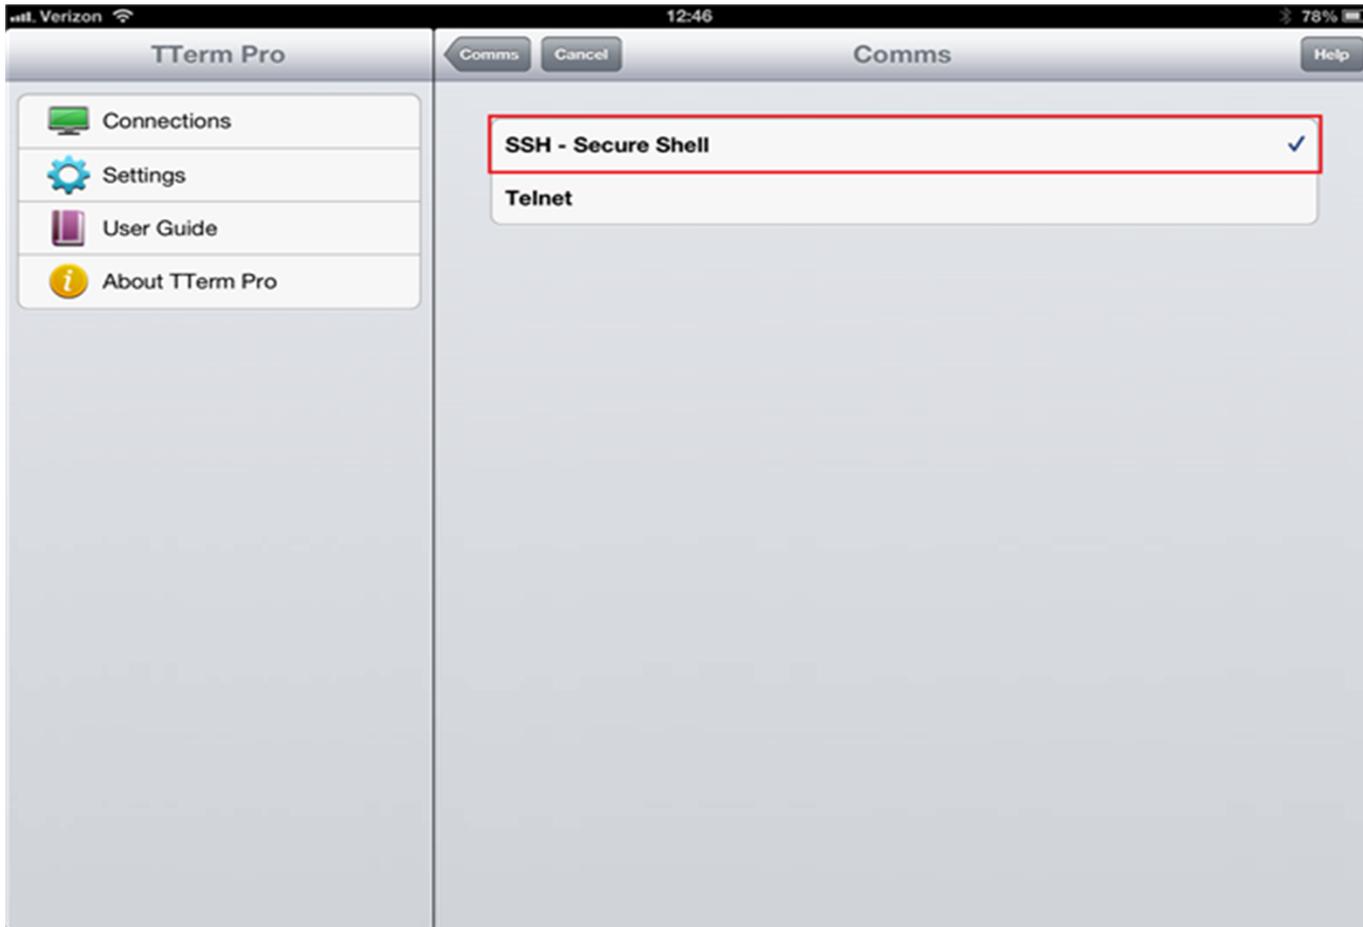

20. Now select *Remote hostname or IP address*

21. Enter the IP Address of the location you wish to connect to

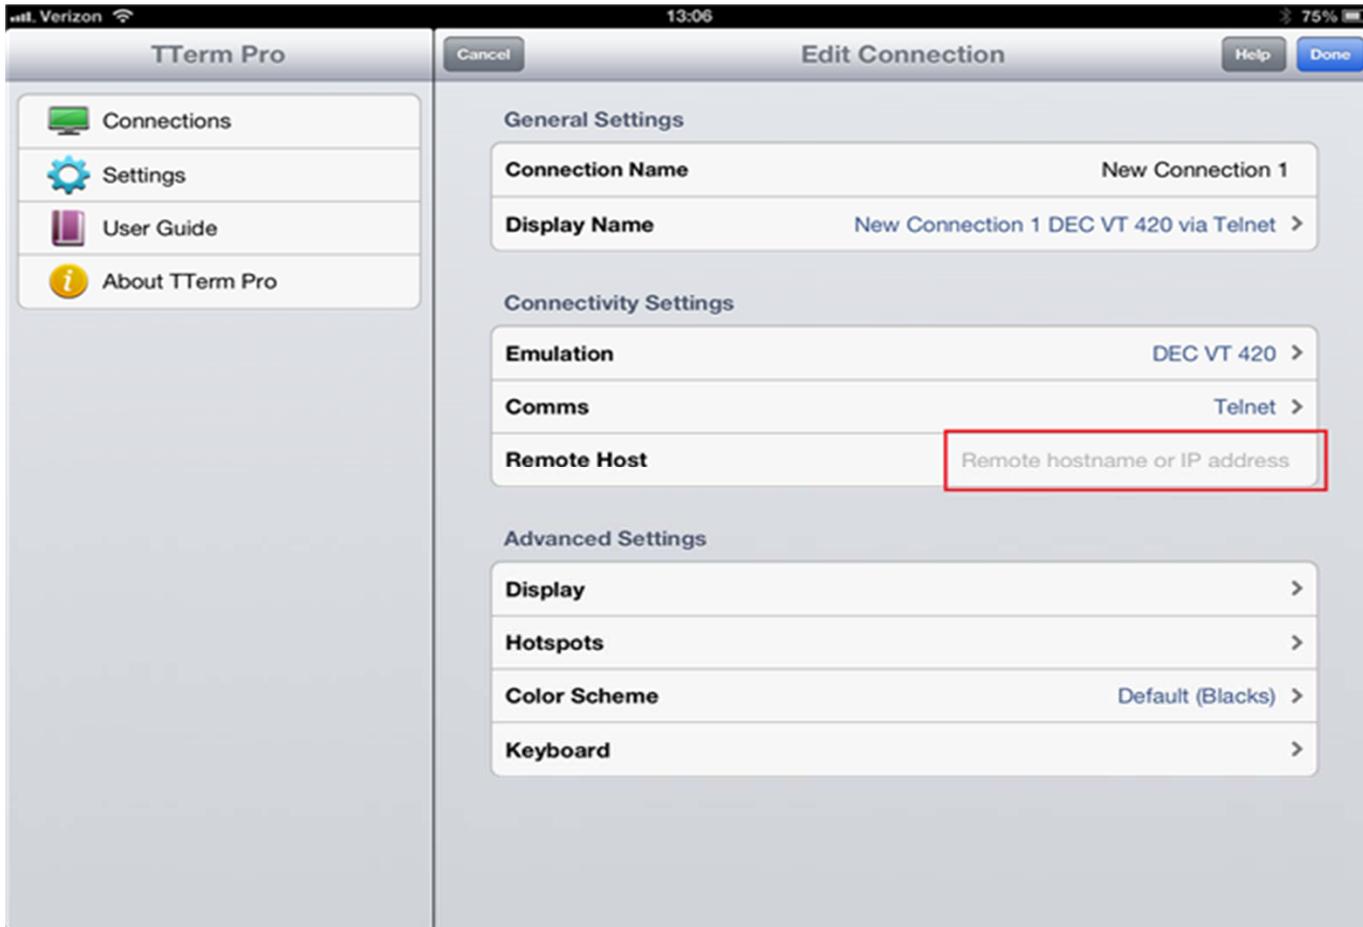


22. Your screen should look similar to one below with the **Connection Name** and **Remote Host** being what you inputed

23. Click **DONE** at the top right




24. This will bring you back to this window. Click on **CONNECT**

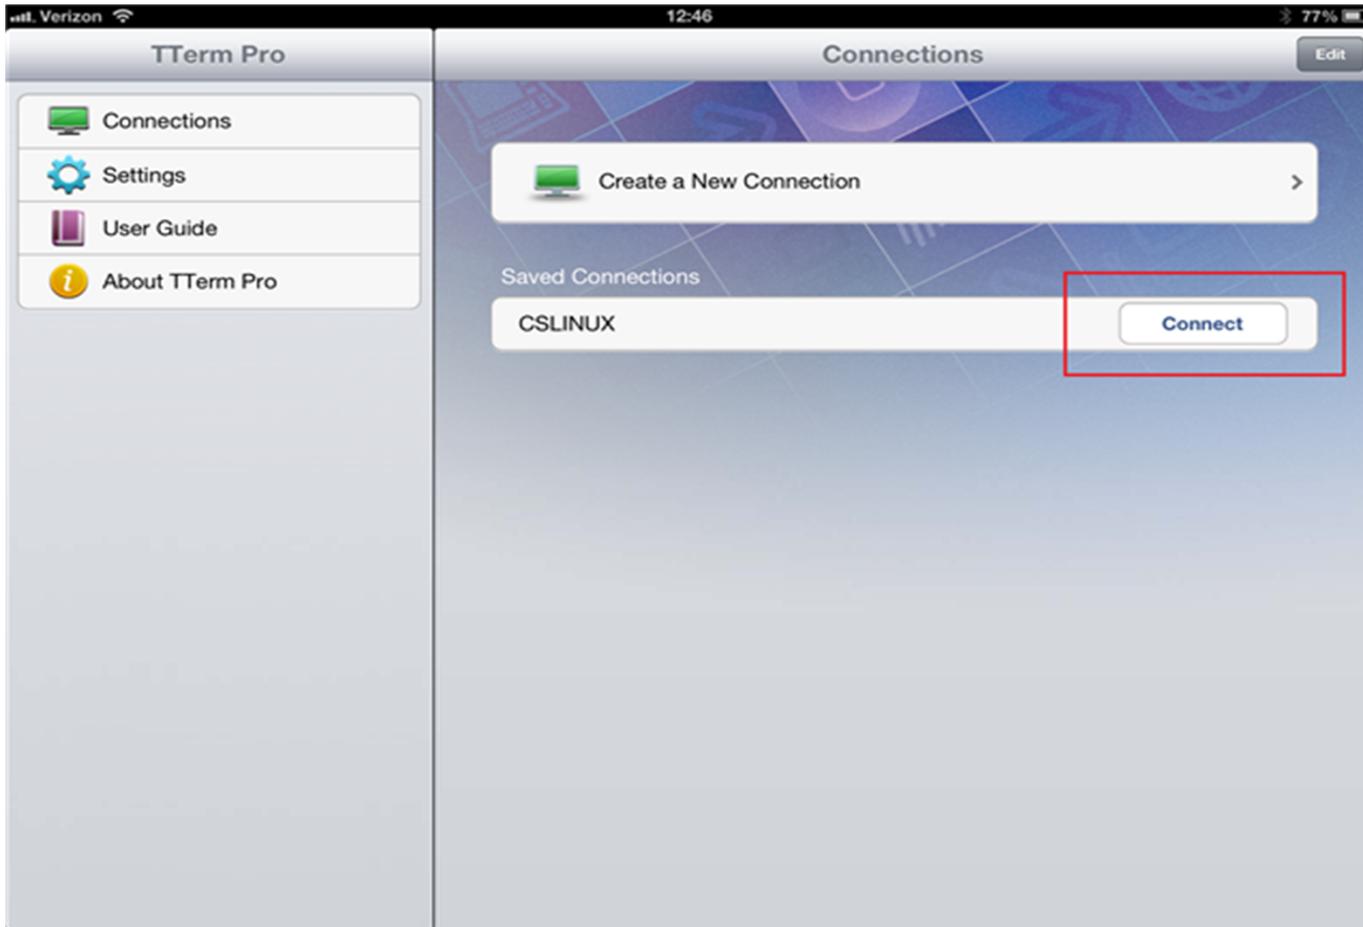

25. You will be asked to enter your Autologue Username and Password.

26. Click **Done** after you've entered them

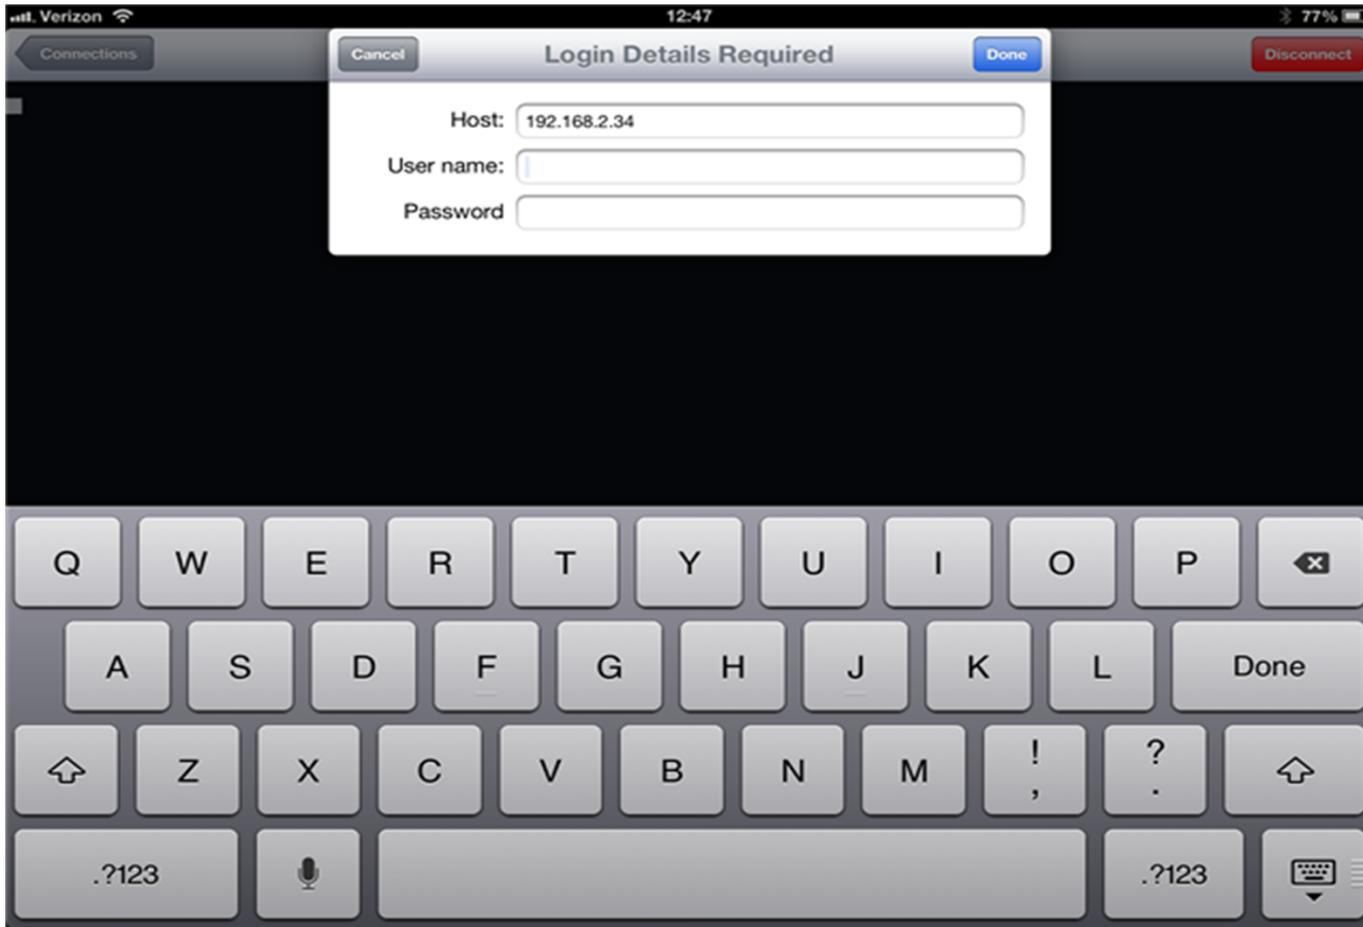

27. The first time you login, you will see a Security Warning, answer **YES**.

28. You should now have your Main Menu or POS screen that is used with your USERNAME

